

DEPARTMENT OF TRANSPORTATION
DIVISION OF ENGINEERING SERVICES
 OFFICE ENGINEER, MS 43
 1727 30TH STREET
 P.O. BOX 168041
 SACRAMENTO, CA 95816-8041
 FAX (916) 227-6214
 TTY 711



Flex your power!
Be energy efficient!

November 10, 2010

03-ED-50-77.3/79.3
 03-1A73U4
 Project ID 0300020124
 ACSTP-P050(120)E

Addendum No. 5

Dear Contractor:

This addendum is being issued to the contract for CONSTRUCTION ON STATE HIGHWAY IN EL DORADO COUNTY IN SOUTH LAKE TAHOE FROM TROUT CREEK BRIDGE TO SKI RUN BOULEVARD.

Submit bids for this work with the understanding and full consideration of this addendum. The revisions declared in this addendum are an essential part of the contract.

Bids for this work will be opened on Tuesday, November 16, 2010.

This addendum is being issued to revise the Notice to Bidders and Special Provisions, and the Bid book.

In the Special Provisions, Section 10-1.21, "COOPERATION," the following is added to the table:

Contract No.	Co-Rte- PM	Location	Type of Work
03-1A7344	ED-50-78.9-79.5	Ham Lane to Wildwood Ave	Drainage improvements

In the Special Provisions, Section 10-1.33, "EXISTING HIGHWAY FACILITIES," subsection "COLD PLANE ASPHALT CONCRETE PAVEMENT," subsection "MEASUREMENT AND PAYMENT," the first paragraph is revised as follows:

"Cold plane asphalt concrete pavement shall be measured and paid for by the square yard and paid for one time as shown on the plans and includes all lifts in all stages."

In the Special Provisions, Section 10-1.78, "MISCELLANEOUS METAL (DELAWARE SAND FILTER)," the third paragraph is revised as follows:

"Miscellaneous metal (Delaware Sand Filter) shall conform to the requirements in Section 75-1.02 "Miscellaneous Iron and Steel," of the Standard Specifications and shall consist of the following items:

- A. Ladders and associated hardware
- B. Expansion Anchors
- C. Riser Support Brackets
- D. Anchor Straps, Wire Mesh, and associated hardware at weep hole locations
- E. Steel Door Access Hatch"

Addendum No. 5
Page 2
November 10, 2010

03-ED-50-77.3/79.3
03-1A73U4
Project ID 0300020124
ACSTP-P050(120)E

In the Bid book, in the "Bid Item List," Items 52 and 98 are revised as attached.

To Bid book holders:

Replace pages 5 and 7 of the "Bid Item List" in the Bid book with the attached revised pages 5 and 7 of the Bid Item List. The revised Bid Item List is to be used in the bid.

Inquiries or questions in regard to this addendum must be communicated as a bidder inquiry and must be made as noted in the Notice to Bidders section of the Notice to Bidders and Special Provisions.

Indicate receipt of this addendum by filling in the number of this addendum in the space provided on the signature page of the Bid book.

Submit bids in the Bid book you now possess. Holders who have already mailed their book will be contacted to arrange for the return of their book.

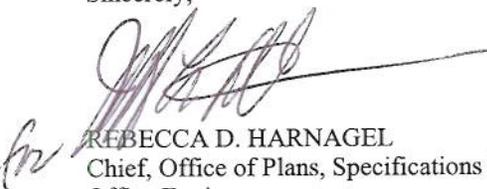
Inform subcontractors and suppliers as necessary.

This addendum and attachments are available for the Contractors' download on the Web site:

http://www.dot.ca.gov/hq/esc/oe/project_ads_addenda/03/03-1A73U4

If you are not a Bid book holder, but request a book to bid on this project, you must comply with the requirements of this letter before submitting your bid.

Sincerely,


REBECCA D. HARNAGEL
Chief, Office of Plans, Specifications & Estimates
Office Engineer
Division of Engineering Services

Attachments

BID ITEM LIST
03-1A73U4

Item No.	Item Code	Item Description	Unit of Measure	Estimated Quantity	Unit Price	Item Total
41	152403	ADJUST WATER METER BOX TO GRADE	EA	8		
42	019239	ADJUST TELEPHONE VAULT TO GRADE	EA	27		
43	019240	ADJUST TELEPHONE MANHOLE TO GRADE	EA	5		
44	019241	ADJUST FIBER OPTIC BOX TO GRADE	EA	1		
45	019242	ADJUST SEWER MANHOLE TO GRADE	EA	32		
46	019243	ADJUST SEWER VALVE COVER TO GRADE	EA	1		
47	152610	MODIFY MANHOLE	EA	1		
48	153103	COLD PLANE ASPHALT CONCRETE PAVEMENT	SQYD	61,000		
49	153211	REMOVE CONCRETE SIDEWALK AND DRIVEWAY	SQYD	630		
50	153215	REMOVE CONCRETE (CURB AND GUTTER)	LF	19,400		
51	160101	CLEARING AND GRUBBING	LS	LUMP SUM	LUMP SUM	
52	160120	REMOVE TREE	EA	97		
53	190101	ROADWAY EXCAVATION	CY	14,800		
54	190110	LEAD COMPLIANCE PLAN	LS	LUMP SUM	LUMP SUM	
55	192021	STRUCTURE EXCAVATION (TYPE DH)	CY	330		
56 (F)	042819	STRUCTURE EXCAVATION (TYPE D) (DSF)	CY	1,830		
57 (F)	042820	STRUCTURE BACKFILL (DSF)	CY	270		
58	198007	IMPORTED MATERIAL (SHOULDER BACKING)	CY	1,560		
59	200001	HIGHWAY PLANTING	LS	LUMP SUM	LUMP SUM	
60	019244	BOULDER (A)	EA	11		

BID ITEM LIST
03-1A73U4

Item No.	Item Code	Item Description	Unit of Measure	Estimated Quantity	Unit Price	Item Total
81	208738	8" CORRUGATED HIGH DENSITY POLYETHYLENE PIPE CONDUIT	LF	480		
82	019254	STONE WALL	LF	310		
83	019255	FENCE (SPLIT RAIL)	LF	730		
84	260201	CLASS 2 AGGREGATE BASE	CY	6,800		
85	374002	ASPHALTIC EMULSION (FOG SEAL COAT)	TON	1		
86	390132	HOT MIX ASPHALT (TYPE A)	TON	30,500		
87	390133	HOT MIX ASPHALT (TYPE B)	TON	60		
88	390135	HOT MIX ASPHALT (LEVELING)	TON	93		
89	394060	DATA CORE	LS	LUMP SUM	LUMP SUM	
90	394090	PLACE HOT MIX ASPHALT (MISCELLANEOUS AREA)	SQYD	8,160		
91	397005	TACK COAT	TON	65		
92	500001	PRESTRESSING CAST-IN-PLACE CONCRETE	LS	LUMP SUM	LUMP SUM	
93 (F)	042821	STRUCTURAL CONCRETE (DSF)	CY	422		
94 (F)	510090	STRUCTURAL CONCRETE, BOX CULVERT	CY	66		
95 (F)	510502	MINOR CONCRETE (MINOR STRUCTURE)	CY	243		
96	510526	MINOR CONCRETE (BACKFILL)	CY	2,410		
97 (F)	520107	BAR REINFORCING STEEL (BOX CULVERT)	LB	15,683		
98 (F)	042822	BAR REINFORCING STEEL (EPOXY COATED) (DSF)	LB	144,600		
99	560248	FURNISH SINGLE SHEET ALUMINUM SIGN (0.063"-UNFRAMED)	SQFT	570		
100	560249	FURNISH SINGLE SHEET ALUMINUM SIGN (0.080"-UNFRAMED)	SQFT	71		